VAXIS AIR FOR LITECOMM

User Guide

目录

如何使用

耳机图示 04
开/关机 05
配对 06
NFC 配对 07
佩戴 09
音量调节 10
静音模式 11
多功能键 13
检查电量 14

拓展功能

EQ模式说明 16
EQ模式切换 17
双设备连接 18
关闭双设备连接 24
恢复出厂设置 26
提示音语言切换 28

维护保养

充电提示 31
汗液检测功能 32
存储与维护 33

售后服务 34

装箱清单 35

监管与法律信息 36

User Guide

Headset Icon

Power On/Off

Power On:
Press and hold the multifunction button until the blue light flashes and you hear the voice prompt, " On."
Power Off:
Press and hold the multifunction button until the red light flashes and you hear the voice prompt, "Off."

Bluetooth Pairing

1.In the power-off state, press and hold the "Multifunction Button" without releasing it.
2.Keep holding the "Multifunction Button" until the indicator light starts flashing red and blue alternately. This indicates that the headphones are now in pairing mode.

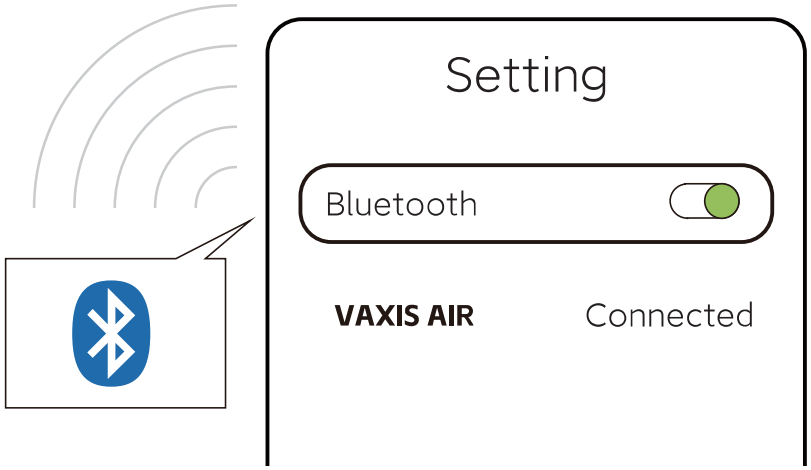

3.Open the Bluetooth settings on your device, select "VAXIS AIR," and you will hear a voice prompt saying "Connected."

NFC Pairing

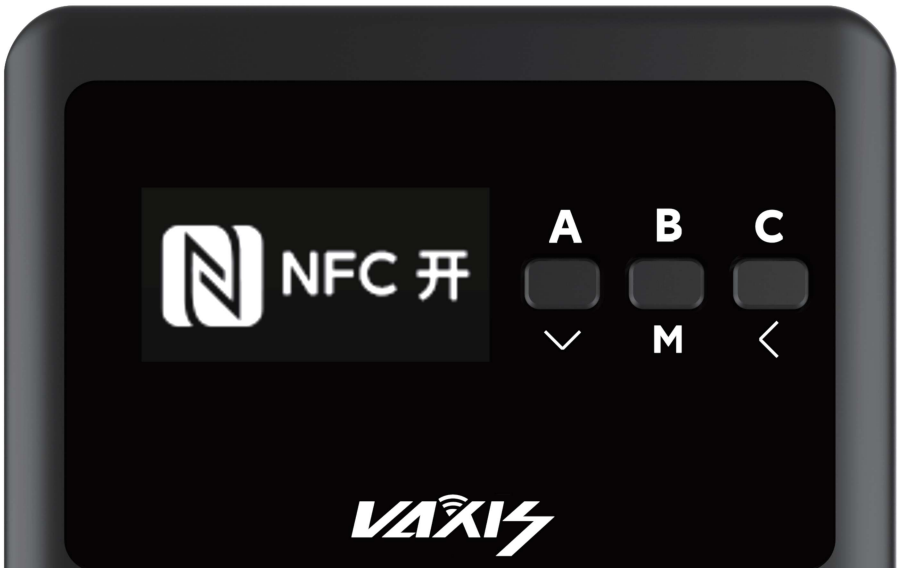

1.Long-press the NFC button on the main device until the screen displays the message "NFC On."

2.Place the NFC tag on the headphones in contact with the NFC button on the main device.

3.On the main device, the NFC icon in the upper right corner will turn green,wait for 1 to 3 seconds for the prompt indicating successful pairing.

4.The headset blue light being constantly on indicates a successful pairing.

Wearing

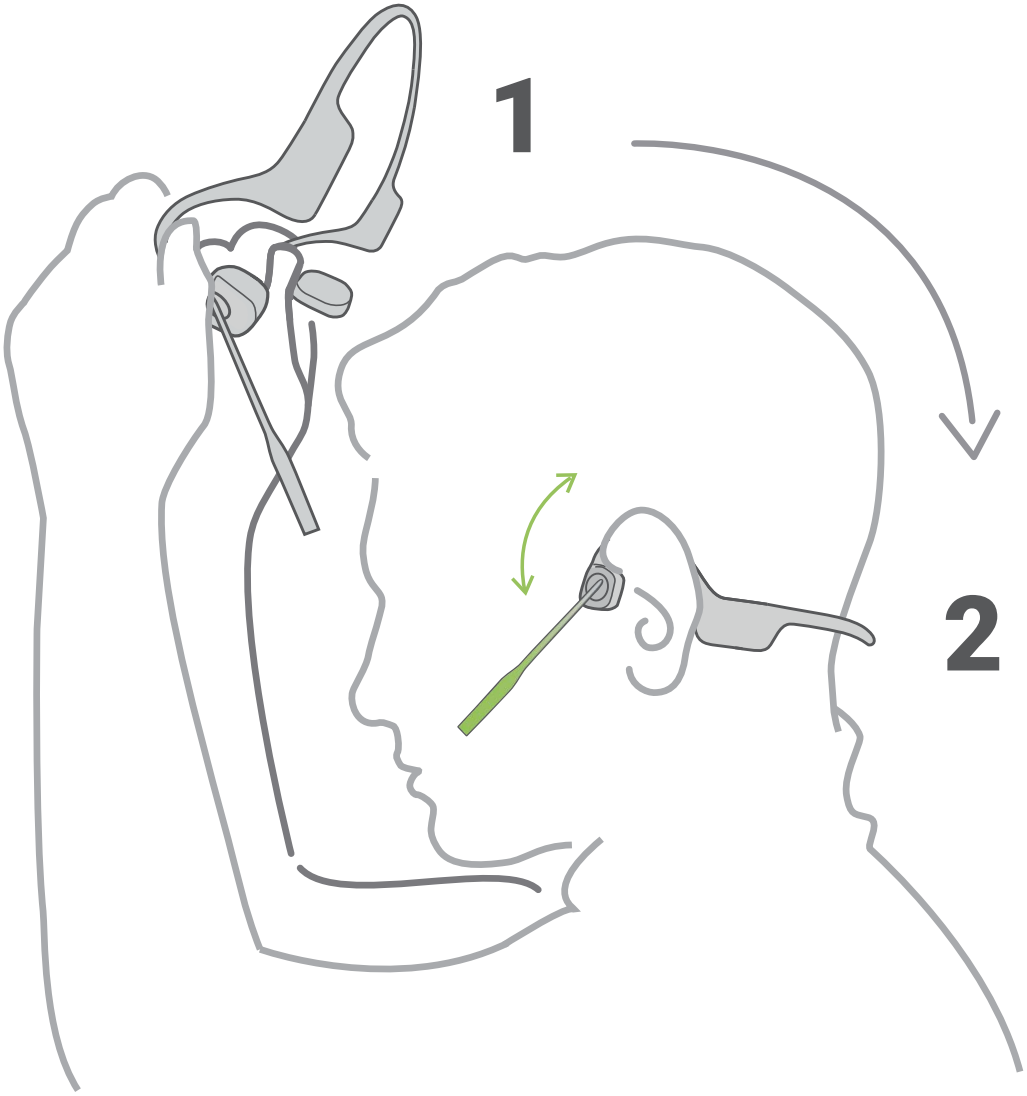

Separate the headsets with both hands and wear them to the appropriate position.

If you need to make a call, please lower the noise-canceling microphone and adjust it to the appropriate position

Please pay attention to wearing the headsets correctly when using them. Wearing them incorrectly may cause dis-comfort. The sound-producing part of the headsets should be positioned in front of your ears without inserting them into the ear canal..

Mute Mode

Operating Method

1.Rotate the noise-canceling microphone down to talk, and rotate it up to avoid calls (not to mute the microphone)

2.Press the power button and listen for the headset prompt "Mic Off" or "Mic On" to disable or enable the noise-canceling microphone for conversation.

Volume Adjustment

Operating Method

1.Single-click the volume up button to increase the volume, and single-click the volume down button to decrease the volume.When the volume is too high, you will hear a "beep" sound as a volume reminder.
2.It is advised not to wear headsets at maximum volume for extended periods of time to avoid potential hearing damage.

Multifunction Button

Play/Pause Music

Double-click the Multifunction Button

Answer Call

Double-click the Multifunction Button

End Call

Double-click the Multifunction Button

Reject Call

Long-press the Multifunction Button

Call Switching

Long-press the Multifunction Button

More Functions

Next Track	Long-press "+" button
Previous Track	Long-press "−" button
Volume Up	Short-press "+" button
Volume Down	Short-press "−" button
Call Volume Up	Short-press "+" button
Call Volume Down	Short-press "−" button

*Other buttons complete other functions. The above part related to calls is only applicable to phone calls, not to voice calls or video calls made by third-party software.

Check the Battery Level

This operation should be performed when the headsets are in standby mode and there is no audio play-back.

Operating Method

1.In standby mode with no audio playback, a single press of the power/volume+ button or the volume- button will result in the headsets providing the battery level information through voice prompts.
2.Volume voice broadcast content: “High power/ Medium power/ Low power/ Please charge.”

拓展功能

EQ模式说明

标准模式：
标准聆听模式，开放双耳

耳塞模式：
在安全的条件下使用耳塞
进行环境噪音的屏蔽，
例如在列车或者工厂中

EQ模式切换

需在耳机播放音频
过程中进行操作

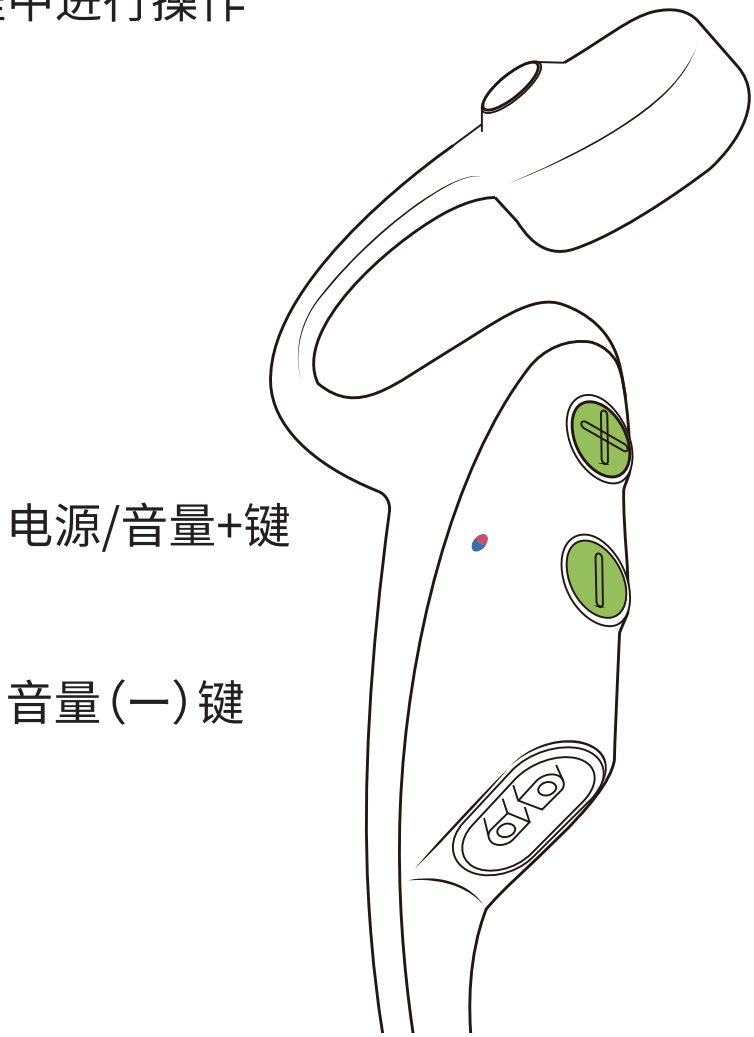

操作方法：

确保耳机正在播放音频，同时长按电源/音量+键与音量(一)键，保持3秒，耳机将会进行对应模式的提示音播报，松开按钮切换到播报的模式。

*音量的语音播报内容：“音效切换”

双设备连接

同时连接双设备

一部耳机可以同时连接两台蓝牙设备
实现设备间的无缝切换
多任务处理，毫无压力

开启双设备连接

OFF 需在耳机关机状态下
进行操作

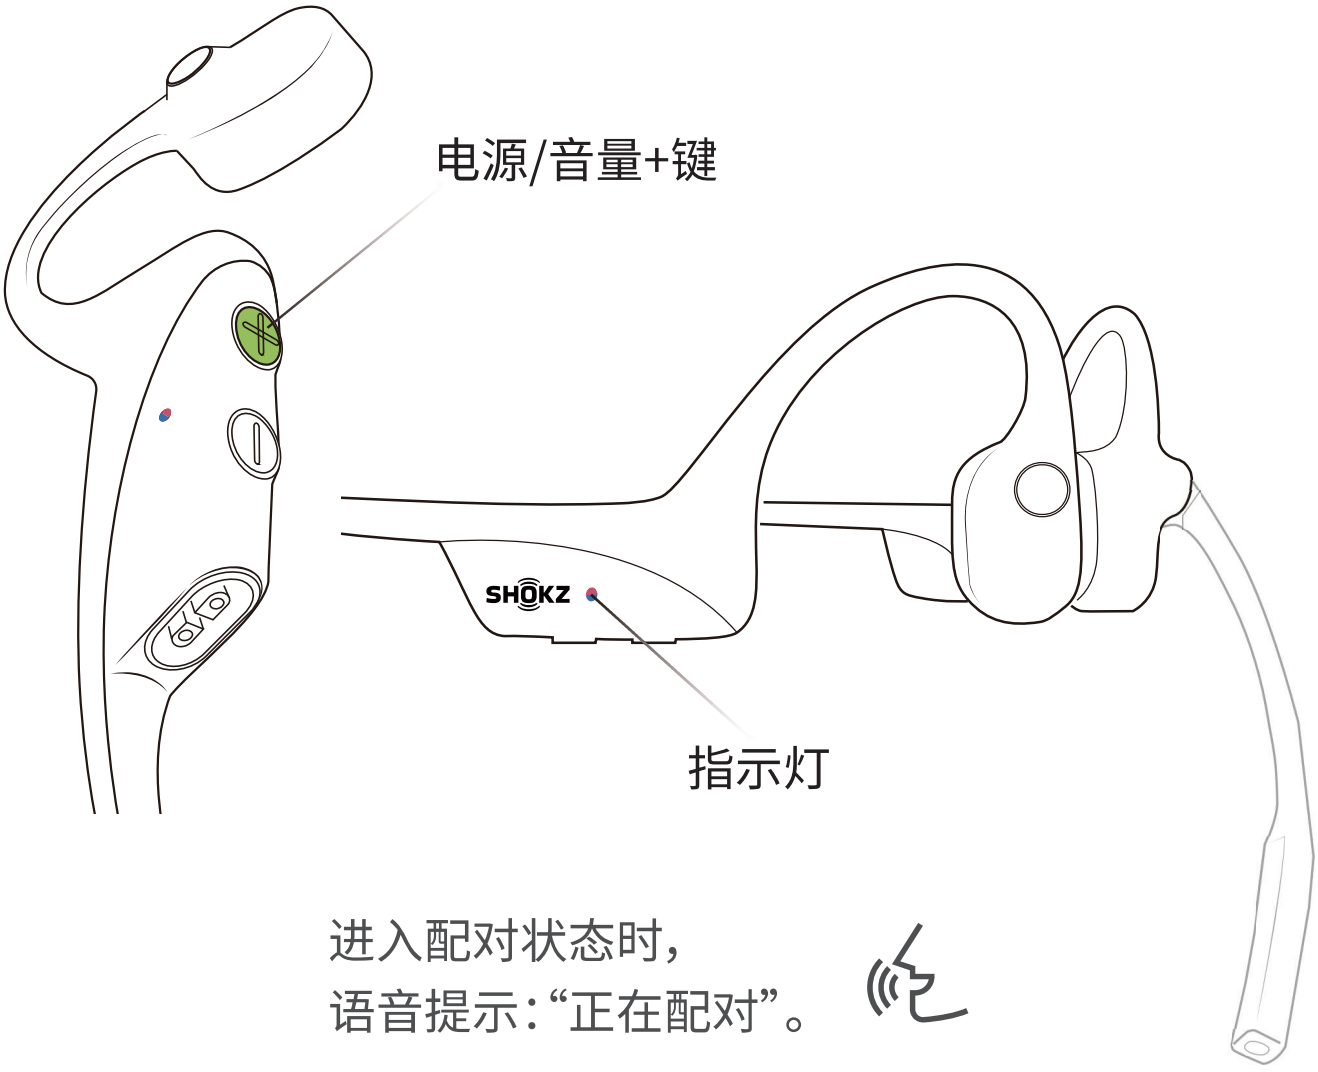

进入配对状态时，
语音提示：“正在配对”。

1. 确保耳机处于关机状态
2. 长按电源/音量+键直至红蓝灯交替闪烁，进入配对状态。

*进入配对模式时，语音提示：“正在配对”。

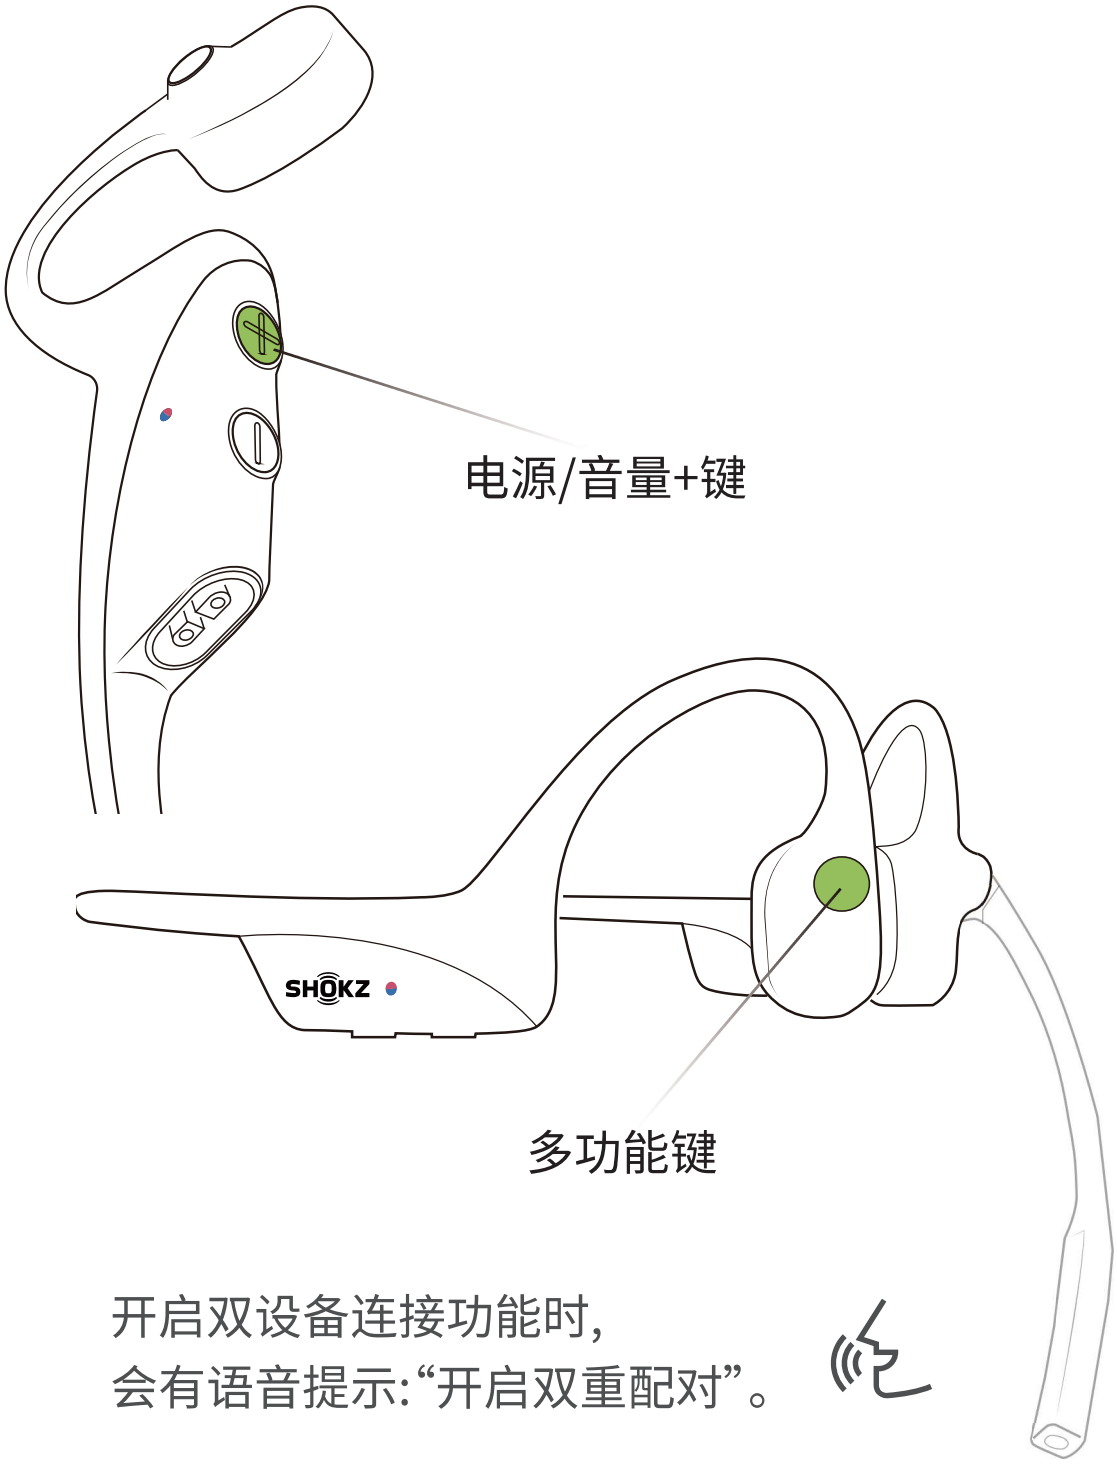

3.同时按住多功能键与电源/音量+键直至耳机发出语音提示。

*开启双设备连接功能时,会有语音提示:“开启双重配对”。

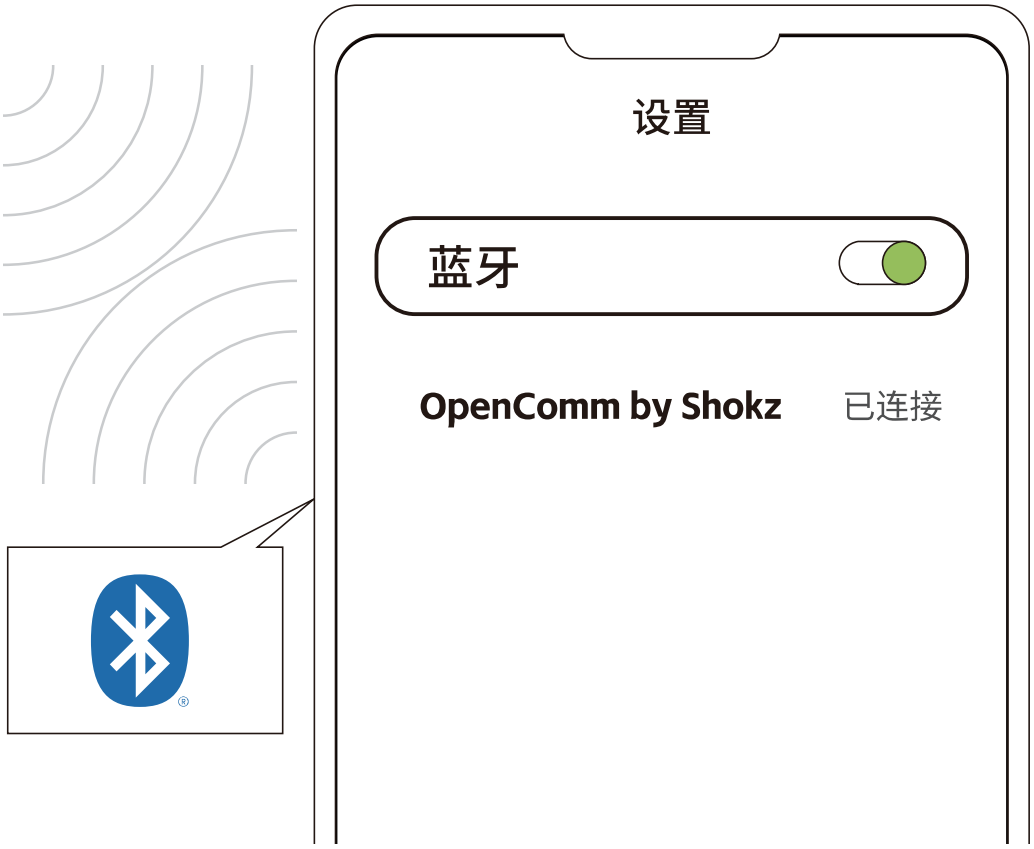

设备1

第一台设备连接成功时，
会有语音提示:“已连接”。

4.打开第一台设备的蓝牙配对列表，并且选择“OpenComm by Shokz”进行连接配对。

*第一台设备连接成功时，会有语音提示：“已连接”。

5.关闭耳机

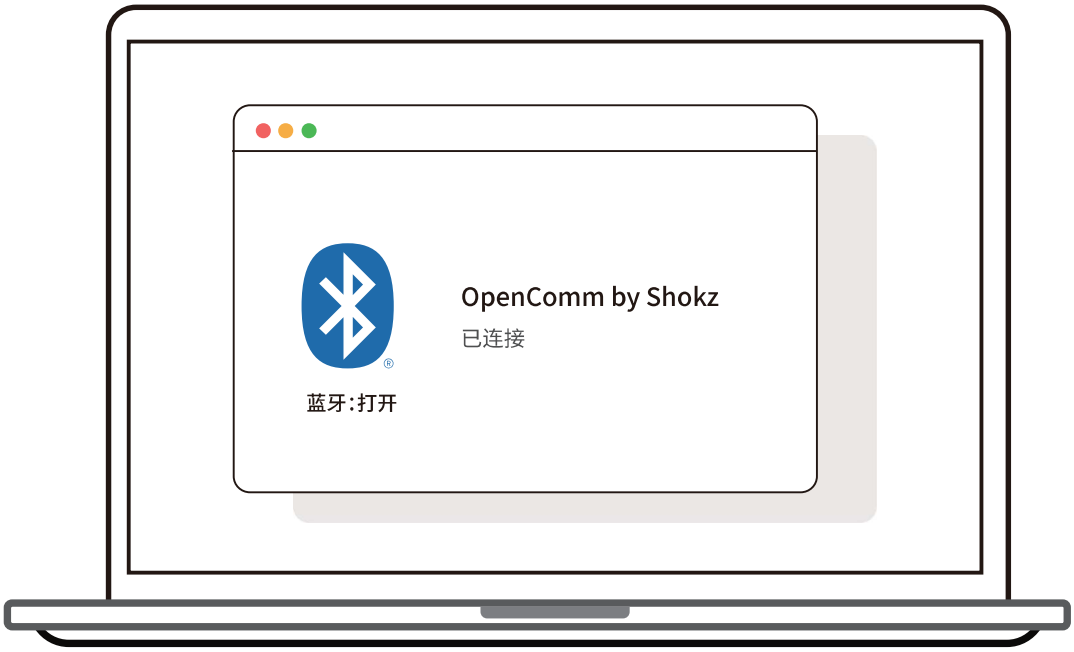

设备2

第二台设备连接成功时，
会有语音提示:“已连接”。

6.重新进入配对状态

7.打开第二台设备的蓝牙配对列表，并且选择“OpenComm by Shokz”进行连接配对。

*第二台设备连接成功时，会有语音提示：“已连接”。

8.关闭耳机

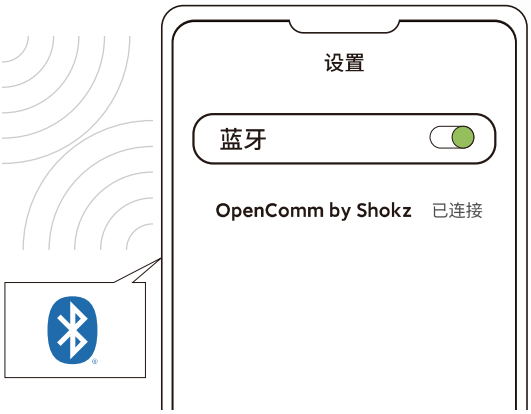

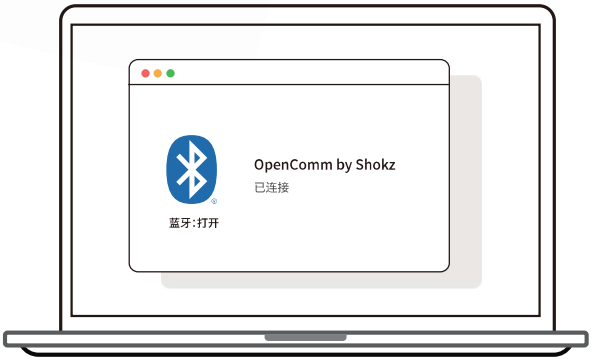

设备1 ✓

设备2 ✓

首先开机后，会听到:“欢迎使用韶音运动耳机”。
紧接着会听到:“已连接，第二台设备已连接”。

9.长按电源/音量+键，耳机开机，
此时听到提示音“欢迎使用韶音运动耳机”，
此时您的耳机会自动连接两台设备，并有提示音，
“已连接，第二台设备已连接”。

关闭双设备连接

OFF 需在耳机关机状态下
进行操作

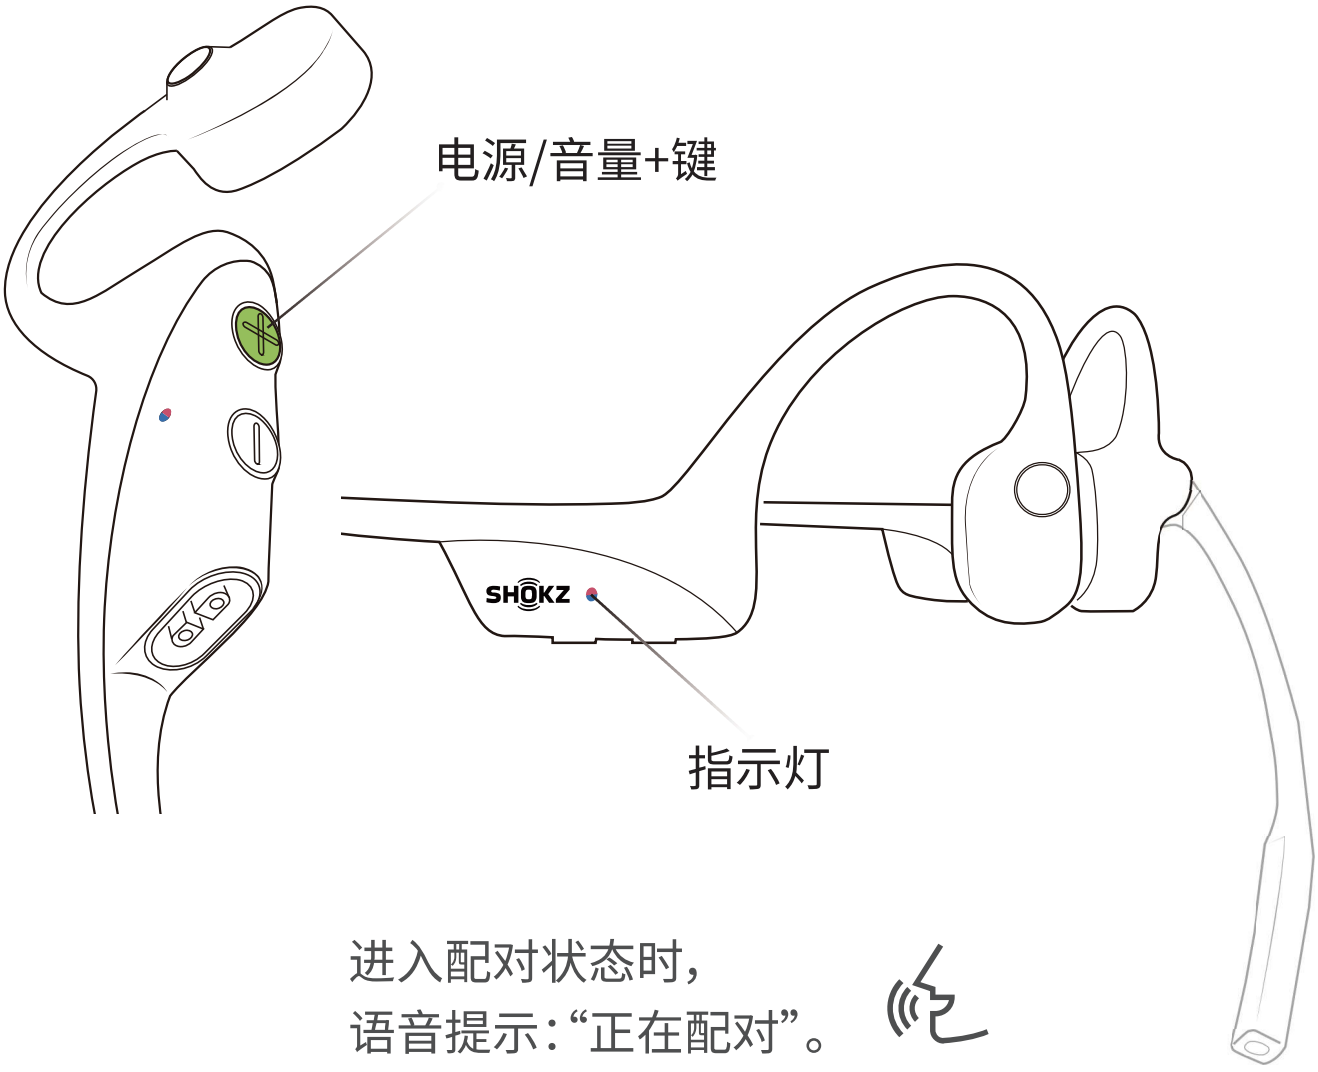

进入配对状态时，
语音提示：“正在配对”。

1. 确保耳机处于关机状态
2. 长按电源/音量+键直至红蓝灯交替闪烁，进入配对状态。

*进入配对模式时，语音提示：“正在配对”。

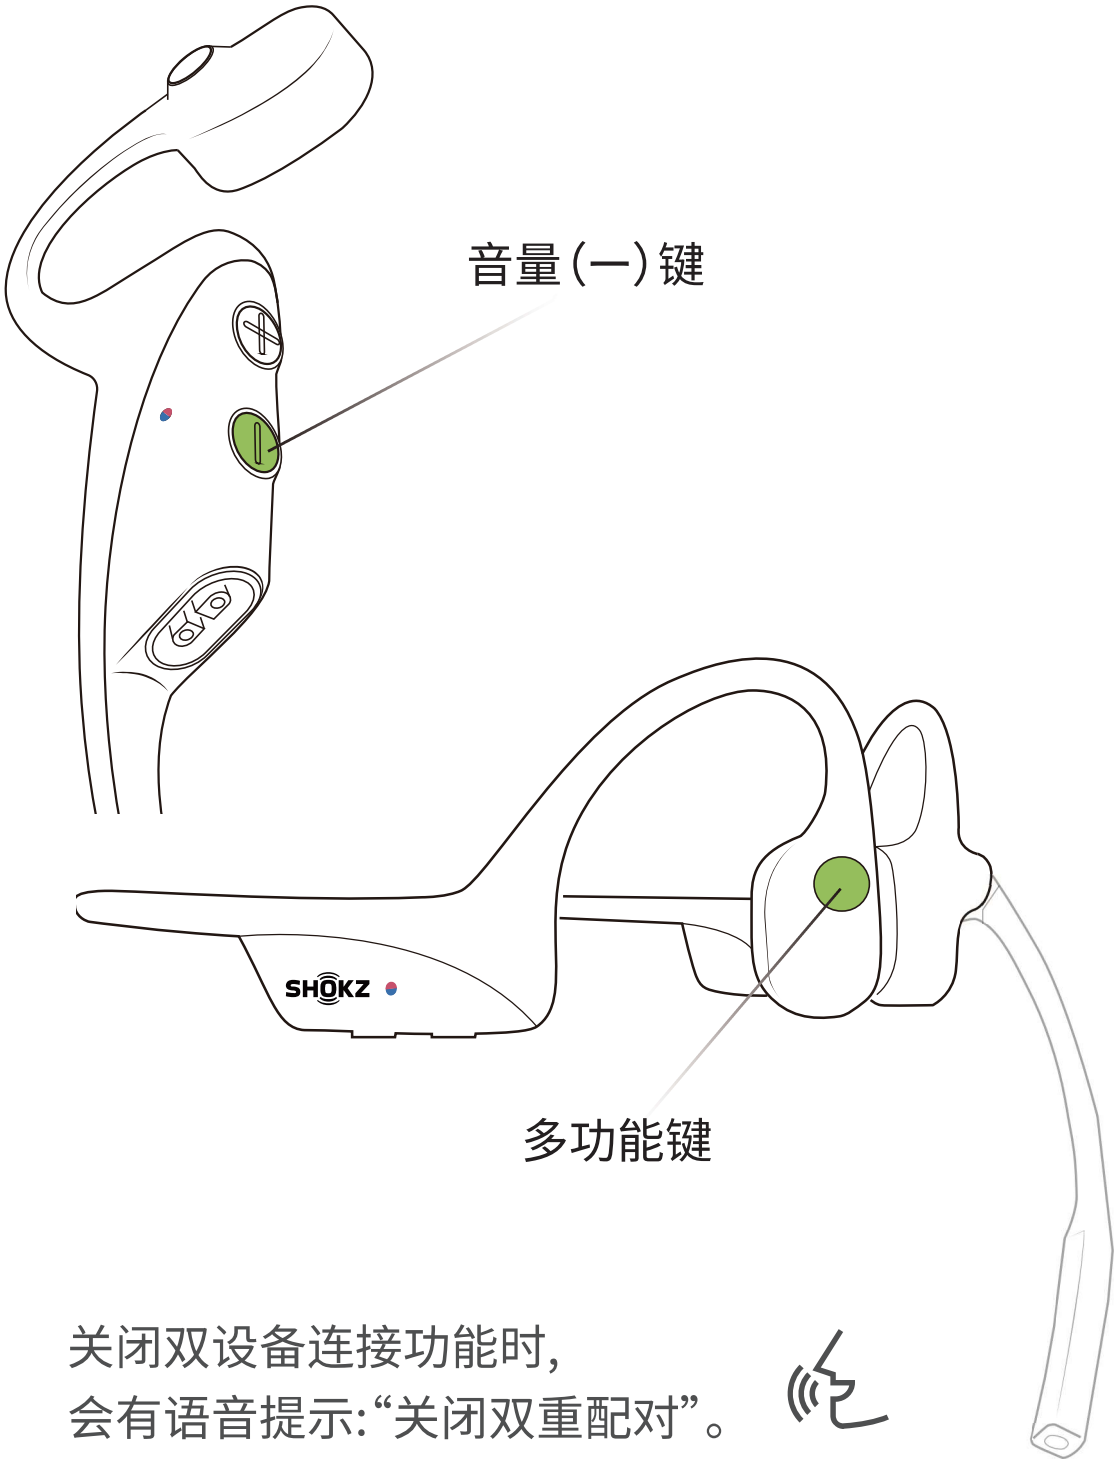

关闭双设备连接功能时，
会有语音提示:“关闭双重配对”。

3. 然后按住多功能按键和音量(一)键直至耳机发出提示音。

*关闭双设备连接功能时,会有语音提示:“关闭双重配对”。

恢复出厂设置

OFF 需在耳机关机状态下
进行操作

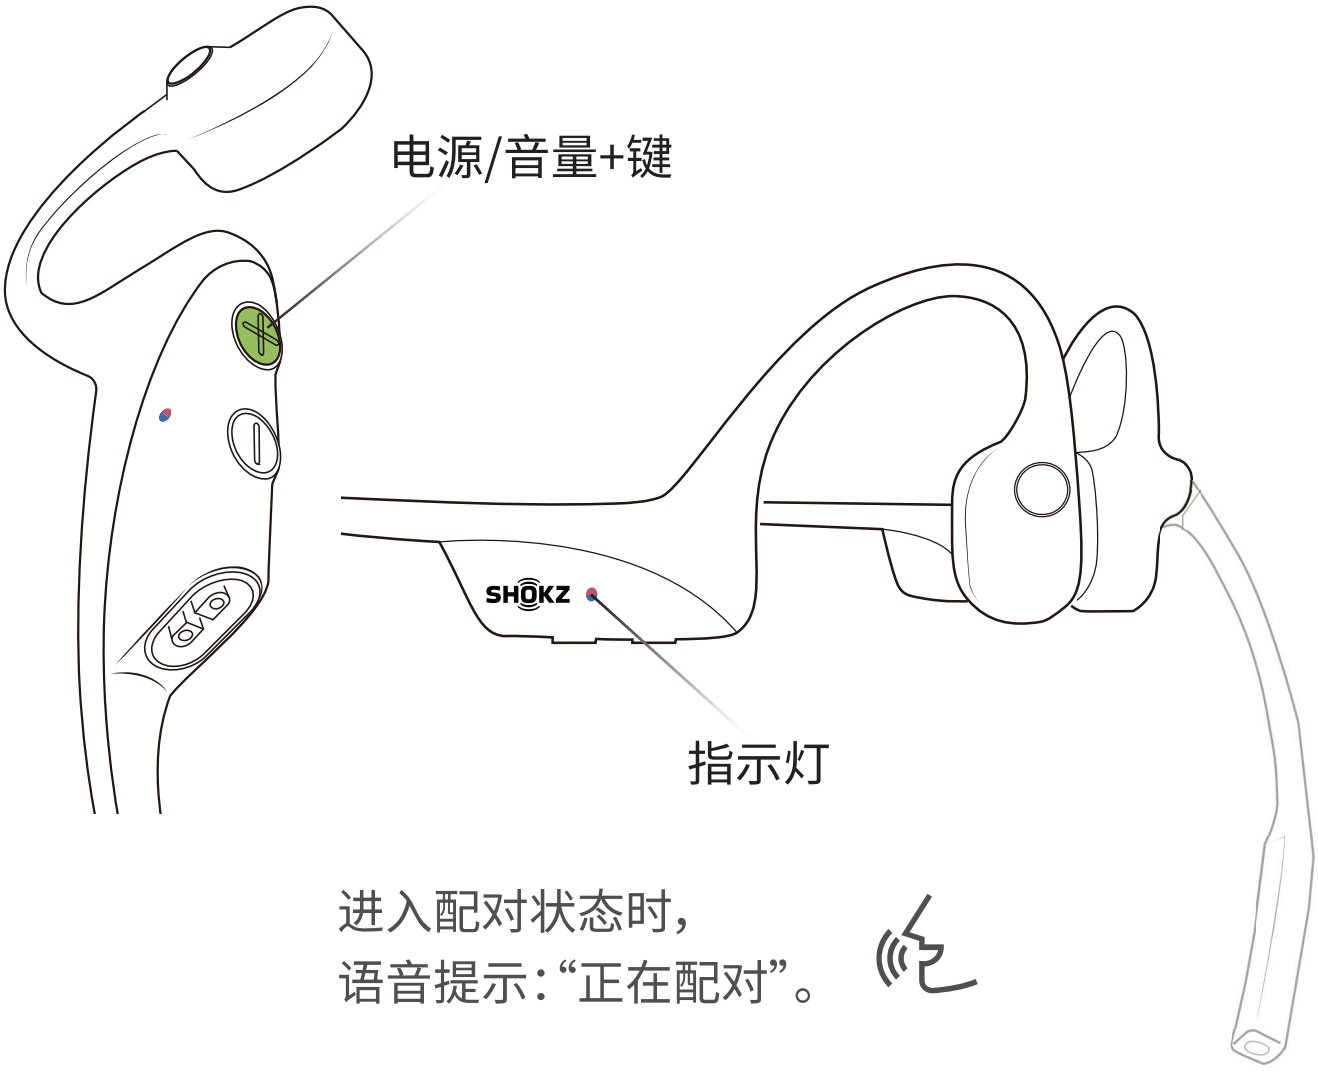

进入配对状态时，
语音提示：“正在配对”。

1. 确保耳机处于关机状态。
2. 长按电源/音量+键直至红蓝灯交替闪烁，进入配对状态。

*进入配对模式时，语音提示：“正在配对”。

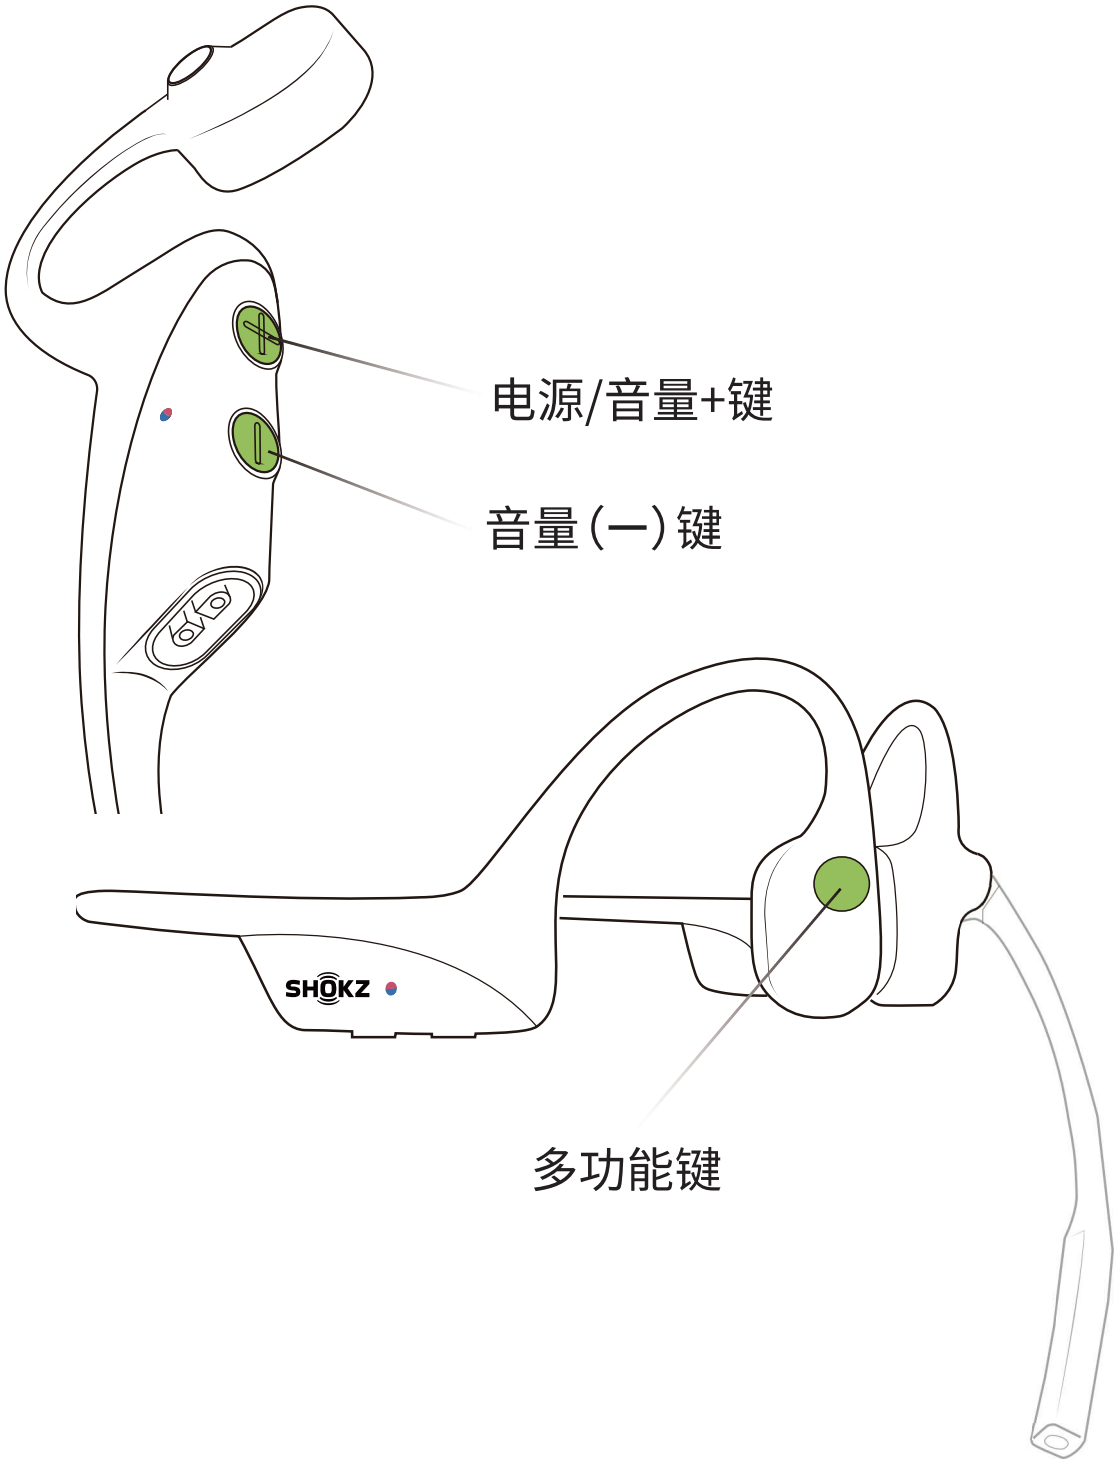

3.长按多功能键，音量-键，音量+键，直到听到两声提示音同时感受振动。

4. 将耳机关机，OpenComm 已经被重置需要重新于您的设置进行配对使用.

提示音语言切换

耳机已内置四种不同语种提示音：中、英、日、韩。

OFF 需在耳机关机状态下
进行操作

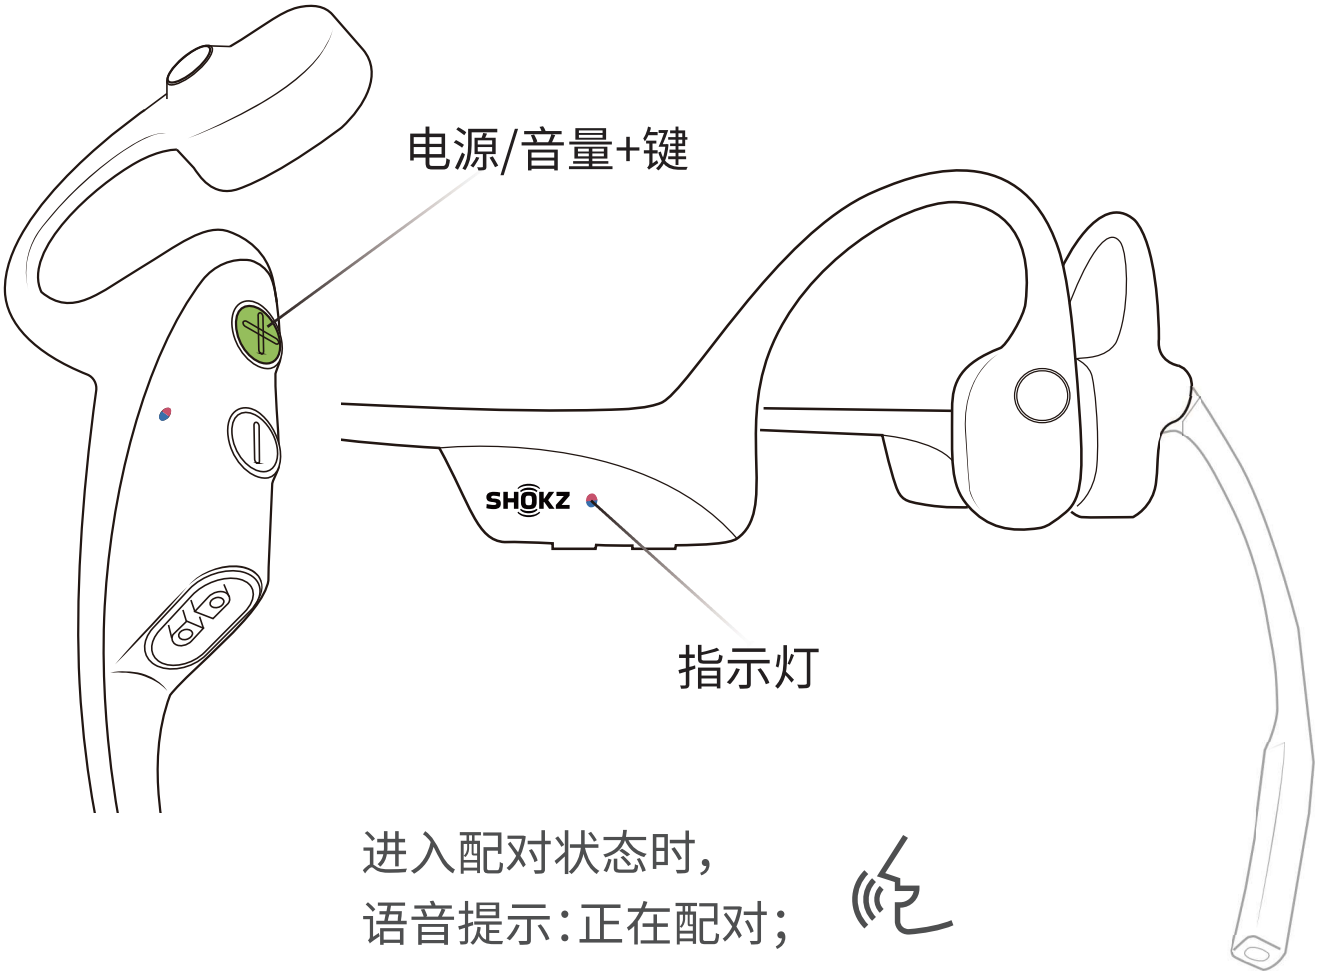

进入配对状态时，
语音提示：正在配对；

1. 确保耳机处于关机状态
2. 长按电源/音量+键直至红蓝灯交替闪烁，进入配对状态。
（语音提示：正在配对）

Bluetooth Pairing

Maintenance and Care

Charging Reminder

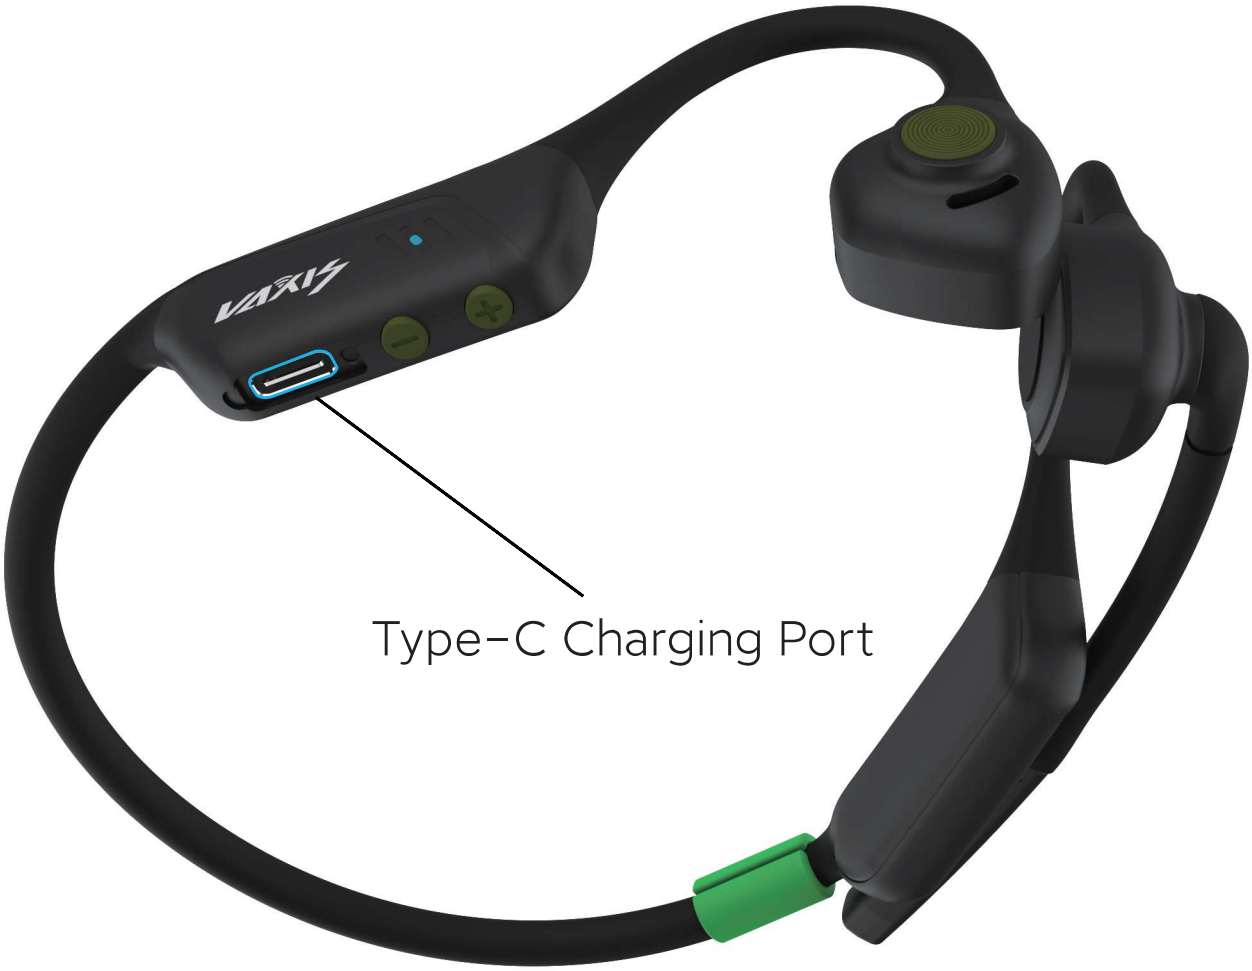

There is a power prompt of the headset on the main unit of the communication system.If the headset's battery is low, you will hear a prompt saying "Low power." At this point, you need to charge the headsets. There is a Type-C charging port located on the back of the volume button. Simply insert the Type-C cable to begin charging.

Technical Specifications

Bluetooth Specifications	BLluetooth v5.1
Frequency Range	2.4GHz–2.480GHz
Wireless Transmission Range	Approximately 10 meters
Supported Bluetooth Protocols	HSP HFP AVRCP A2DP SBC
	APTX APTX_LL APTX_HD
Built–in Lithium Battery	250mAh
Charging Voltage	DC+5V
Charging Operating Temperature	0~45°C
Charging Protection Cutoff Voltage	Approximately 6.0V
Full Charge Time	Approximately 40 minutes
Wireless Connection Auto Shutdown Time	10 minutes
Out–of–Range Auto Shutdown Time	10 minutes
Call Function	Yes
Interface	Type–C USB port

Storage and Maintenance

The headsets should be stored in a cool and dry place.

The operating temperature should be between 0°C to 45°C.Working in extremely cold, hot, excessively humid, or low-pressure environments may shorten the battery lifespan.

Please keep the product away from heat sources, direct sunlight, flammable gases, or other liquids.

Keeping the charging port dry before charging will reduce the risk of headset damage.

Please clean the headsets with a soft dry cloth.

After long-term storage, please recharge the headsets again before use.

Note:

If there are any design and specification changes, we reserve the right not to notify separately.

For the latest company and product information, please visit www.vaxisglobal.com

Warning:

To avoid the risk of explosion, fire, or toxic chemical leakage,please do not disassemble the product or attempt to replace, deform, or damage the battery by yourself.

售后服务

微信扫描下方二维码立即售后

如遇故障问题，请拨打售后服务热线：
400-6830-858 寻求更多支持！

Packing List

Box

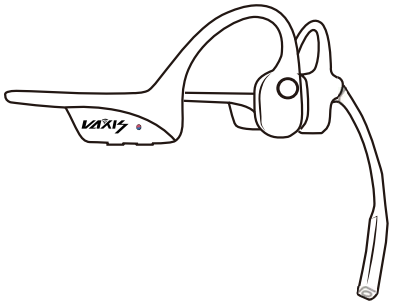

LiteComm
Air Headsets

Type-C Cable

User Guide

If there is any missing content in the above illustrations or if the product has any damage, please do not use it.

Please contact the dealer where you purchased the product or contact us directly.

Please note that the packaging contents may vary due to regional differences in sales.

监管与法律信息

中国大陆有害物质表

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr（VI）)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
印刷线路板	×	○	○	○	○	○
金属部件	×	○	○	○	○	○
电池	×	○	○	○	○	○
塑料部件	○	○	○	○	○	○
线缆	×	○	○	○	○	○

本表格依据 SJ/T 11364 的规定编制。

○ 表示该有害物质在该部件所有均质材料中的含量均在GB/T26572规定的限量要求以下。

× 表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T26572规定的限量要求。

VAXIS AIR
FOR LITECOMM